

Muffen-Schrägsitzventil

Art. 01-009

PN16

Y-type globe valve

Innengewinde nach ISO 228/1

Gehäuse: Rotguss (2.1096 / CC491K)

Innenteile: Messing

Sitzdichtung: PTFE

Temperaturbereich: -10°C - 150°C


female thread acc. to ISO 228/1

Body: gunmetal

Inner parts: brass

Seat sealing: PTFE

temperature range: -10°C - 150°C

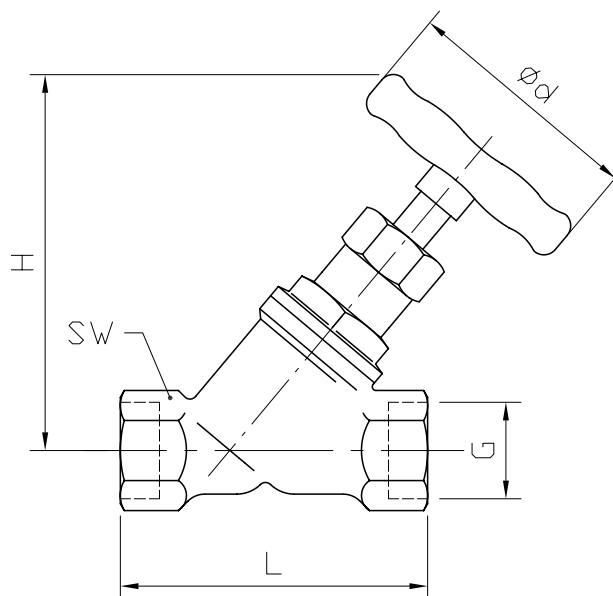

G	L	H	ød	SW	kg						
3/8	56	85	50	23	0,3						
1/2	59	90	55	28	0,3						
3/4	68	115	60	34	0,5						
1	76	135	65	42	0,6						
1 1/4	92	160	75	52	1,1						
1 1/2	100	174	80	56	1,4						
2	125	210	90	70	2,4						
2 1/2	147	256	120	86	4,2						
3	175	310	140	103	6,3						
4	217	360	175	129	10,5						

Andere Ausführung:

Art.-Nr. 01-011 mit Entleerung

other type:

art.-no. 01-011 with drain

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
Internet www.barthel-armaturen.de

06.2010