

Hochdruck-Muffen-Kugelhahn


Art. 03-131

PN400/500

high-pressure ball valve

Gehäuse: Edelstahl
 Innenteile: Edelstahl
 Sitzdichtung: PTFE
 Temperaturbereich: -20°C - 200°C

Body: stainless steel
 Inner parts: stainless steel
 Seat sealing: PTFE
 temperature range: -20°C - 200°C

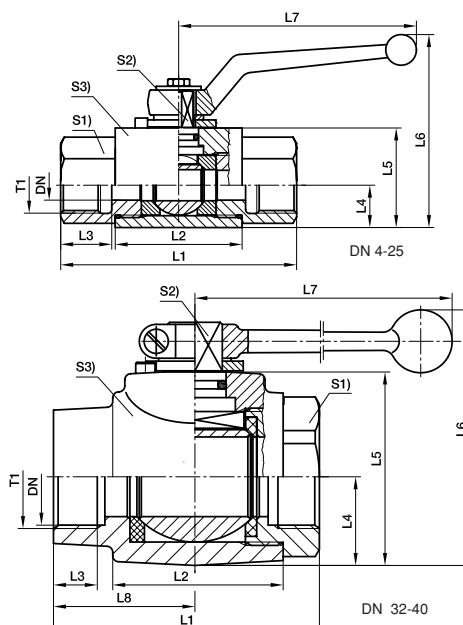

T1/G	DN	P max.	L1	L2	L3	L4	L5	L6	S1/S2/S3	L7	kg
1/8	4	500	69	36	12	10,0	25	55,0	19/7/20	76	0,22
1/4	6	500	69	36	12	10,0	25	55,0	19/7/20	76	0,21
3/8	10	500	73	45	14	14,5	35	68,0	24/8/30	100	0,43
1/2	12	500	82	51	15	17,0	40	92,0	30/10/35	112	0,67
5/8	16	400	88	50	18	20,0	45	105,0	36/11/45	166	0,97
3/4	20	400	93	60	18	24,0	55	113,0	41/14/45	187	1,28
1	25	400	113	70	20	26,0	60	118,0	50/14/55	187	1,98
1 1/4	32	400	110	70	20	36,5	80	180,5	60/17/73	320	2,62
1 1/2	40	400	114	75	22	42,5	90	190,5	70/17/85	320	3,99
2	50	400	129	-	-	49,5	104	-	85/17/-	-	5,02

Andere Ausführungen:
 Art.-Nr. 03-131.1 NPT-Innengewinde
 Art.-Nr. 03-131.3 Kugel-/Wellendichtung
 PTFE-Compound 3/FKM für Druckstufen
 PN250/315

other types:
 art.-no. 03-131.1 NPT female thread
 art.-no. 03-131.3 ball-/shaft sealing
 PTFE-Compound 3/FKM for nominal
 pressure PN250/315

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010