

Hochdruck-Kugelhahn


Art. 03-135.1

PN315/500

high-pressure ball valve

Gehäuse: Stahl
 Innenteile: Stahl, hartverchromt
 Sitzdichtung: POM/NBR
 Temperaturbereich: -10°C - 80°C

Body: steel
 Inner parts: steel chrome-plated
 Seat sealing: POM/NBR
 temperature range: -10°C - 80°C

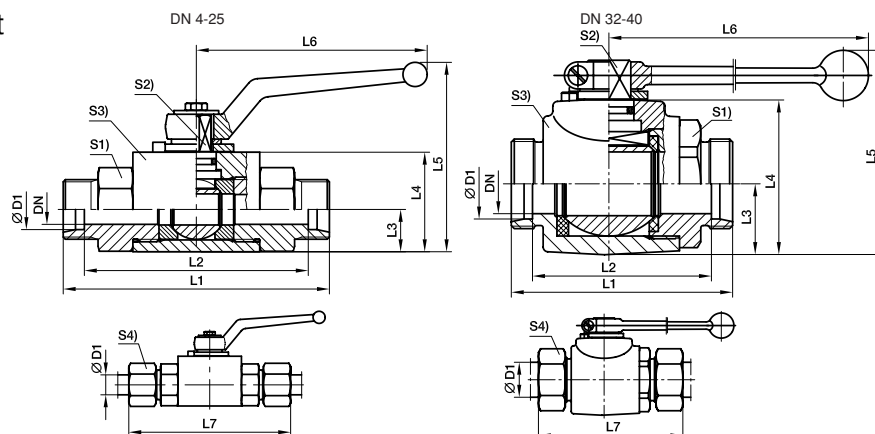

DN	ØD1	P max.	L1/L7	L2	L3	L4	L5	L6	S1/S2	S3/S4	kg
4	06	500	67/82	53	10,0	25	55,0	76	19/7	20/14	0,19
6	08	500	67/82	53	10,0	25	55,0	76	19/7	20/17	0,19
8	10	500	75/90	61	14,5	35	68,0	100	24/8	30/19	0,42
10	12	500	75/90	61	14,5	35	68,0	100	24/8	30/22	0,41
12	15	500	83/99	69	17,0	40	92,0	112	30/10	35/27	0,63
16	18	400	82/99	67	20,0	45	105,0	166	36/11	45/32	0,85
20	22	400	99/116	84	24,0	55	113,0	187	41/14	45/36	1,21
25	25	400	108/126	93	26,0	60	118,0	187	50/14	55/41	17,5
32	32	315	121/143	100	36,5	80	180,5	320	60/17	73/50	3,16
40	40	315	118/141	96	42,5	90	190,5	320	70/17	85/60	3,79

Andere Ausführung:
 Art.-Nr. 03-135.4L Kugel-/Wellendichtung
 PTFE-Compound 3/FKM für Druckstufen
 PN250/315

other type:
 art.-no. 03-135.4L ball-/shaft sealing
 PTFE-Compound 3/FKM for nominal
 pressure PN250/315

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010