

Hochdruck-3-Wege-Muffen-Kugelhahn

Art. 03-140.1

PN400/500

high-pressure 3-way-ball valve

Innengewinde n. ISO 1179-1

Gehäuse: Stahl

Innenteile: Stahl, hartverchromt

Sitzdichtung: POM/NBR

Temperaturbereich: -10°C - 80°C


female thread acc. to ISO 1179-1

Body: steel

Inner parts: steel, chrom.-plated

Seat sealing: POM/NBR

temperature range: -10°C - 80°C

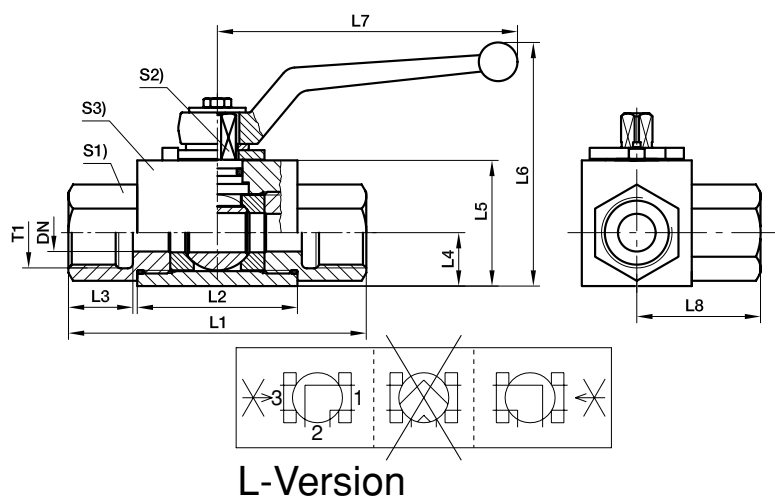

T1/G	DN	P max.	L1	L2	L3	L4	L5/L6	L7	L8	S1/S2/S3	kg
1/8	4	500	69	36	12	15,0	30/55	76	34,5	19/7/30	0,27
1/4	6	500	69	36	12	15,0	30/55	76	34,5	19/7/30	0,34
3/8	10	500	73	45	14	14,5	35/68	100	36,5	24/8/40	0,56
1/2	12	500	82	51	15	22,0	45/92	112	41,0	30/10/45	0,93
3/4	20	400	93	60	18	29,0	60/113	187	48,0	41/14/55	1,72
1	25	400	118	70	20	31,0	65/118	187	56,5	50/14/65	2,64
1 1/4	32	400	134	70	-	31,0	69/-	-	67,0	50/14/-	2,71
1 1/2	40	400	139	70	-	31,0	69/-	-	69,5	55/14/-	2,91

Andere Ausführungen:

Art.-Nr. 03-140.2 NPT-Innengewinde

Art.-Nr. 03-140.5 T-Bohrung

other types:

art.-no. 03-140.2 NPT female thread

art.-no. 03-140.5 T-port

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
Internet www.barthel-armaturen.de

06.2010