

Flansch-Überströmventil

Art. 05-041

PN40


flange overflow valve

Flansche nach DIN PN40

Gehäuse: Stahlguss
 Innenteile: Edelstahl
 Sitzdichtung: metallisch
 Temperaturbereich: -10°C - 400°C

flanges acc. to DIN PN40

Body: cast steel
 Inner parts: stainless steel
 Seat sealing: metallic
 temperature range: -10°C - 400°C

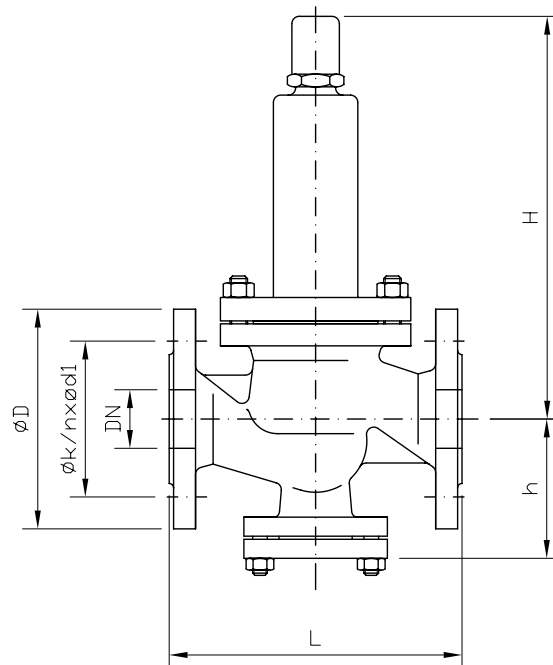

DN	L	h	H	øD	øk	n x ød1	kg				
15	130	95	275	95	65	4 x 14	8,5				
20	150	95	275	105	75	4 x 14	8,5				
25	160	95	275	115	85	4 x 14	10,0				
32	180	95	275	140	100	4 x 18	12,0				
40	200	95	275	150	110	4 x 18	14,0				
50	230	120	360	165	125	4 x 18	24,0				
65	290	155	360	185	145	8 x 18	33,0				
80	310	190	495	200	160	8 x 18	50,0				
100	350	200	495	235	190	8 x 22	72,0				
125	400	210	660	270	220	8 x 26	-				
150	480	235	680	300	250	8 x 26	-				

Andere Ausführungen:

Art.-Nr. 05-041FABA Edelstahl-Faltenbalg
 andere Werkstoffe z.B. Sphäroguss,
 Rotguss, Bronze oder Edelstahl auf Anfrage.

other types:

art.-no. 05-041FABA stainless steel bellow,
 other materials e.g. nodular cast iron,
 gunmetal, zincfree bronze or stainless steel
 on request.

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010