

## Flansch-Druckminderventil

Art. 05-050 DRV502

PN25

pressure reducing valve

Flansche geb. nach DIN PN25

Gehäuse: Rotguss (2.1096 / CC491K)

Innenteile: Messing >DN32 GG

Sitzdichtung: NBR

Temperaturbereich: 0°C - 75°C


flanges acc. to DIN PN25

Body: gunmetal

Inner parts: brass >DN32 CI

Seat sealing: NBR

temperature range: 0°C - 75°C

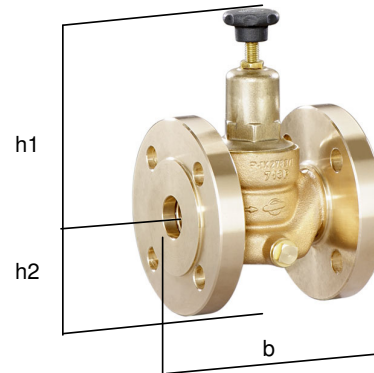

DN 15 - DN 32  
(design DN 80 as below)



| DN | b   | h1  | h2  | Kvs | kg    |  |  |  |  |  |  |  |  |
|----|-----|-----|-----|-----|-------|--|--|--|--|--|--|--|--|
| 15 | 130 | 142 | 48  | 2,9 | 2,37  |  |  |  |  |  |  |  |  |
| 20 | 150 | 143 | 53  | 3,9 | 3,13  |  |  |  |  |  |  |  |  |
| 25 | 160 | 141 | 58  | 5,4 | 4,12  |  |  |  |  |  |  |  |  |
| 32 | 180 | 140 | 72  | 6,1 | 5,84  |  |  |  |  |  |  |  |  |
| 40 | 200 | 241 | 75  | 9   | 8,63  |  |  |  |  |  |  |  |  |
| 50 | 230 | 241 | 83  | 13  | 11,29 |  |  |  |  |  |  |  |  |
| 65 | 290 | 257 | 93  | 20  | 17,94 |  |  |  |  |  |  |  |  |
| 80 | 310 | 257 | 100 | 24  | 20,34 |  |  |  |  |  |  |  |  |
|    |     |     |     |     |       |  |  |  |  |  |  |  |  |
|    |     |     |     |     |       |  |  |  |  |  |  |  |  |

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.  
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16  
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0  
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de  
Internet www.barthel-armaturen.de

06.2010