

Handflügelpumpe

Art. 10-030

semi-rotary pump

DIN 5437-A

Innengewinde nach ISO 228/1

Gehäuse: Grauguss

Innenteile: Messing

Sitzdichtung: -

Temperaturbereich: -10°C - 80°C


female thread acc. to ISO 228/1

Body: cast iron

Inner parts: brass

Seat sealing: -

temperature range: -10°C - 80°C

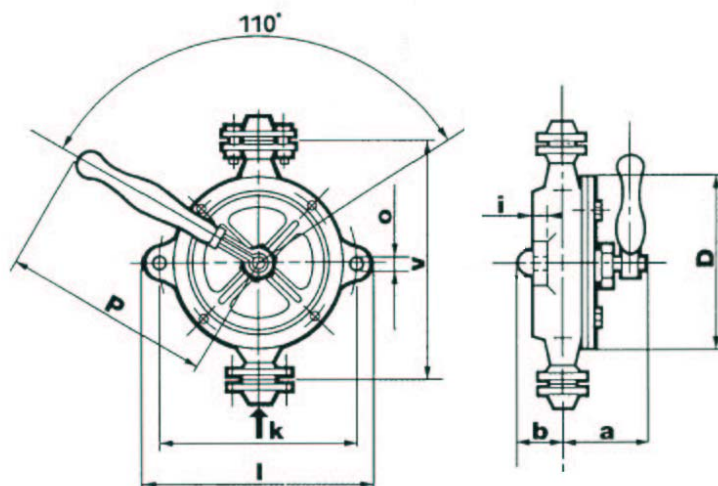

G	DN	l/min	D	a	b	l	k	P	V	O	kg
3/8	K-00	7,5	100	90	45	120	98	220	110	7	3,0
1/2	K-0	11,5	135	140	55	160	130	300	175	13	5,0
3/4	K-1	17,3	150	140	55	180	150	300	205	13	6,0
1	K-2	22,5	170	145	60	200	170	360	230	13	8,0
1 1/4	K-3	29	200	170	62	240	200	450	275	13	11,0
1 1/4	K-4	43	220	190	74	255	220	500	295	13	12,0
1 1/2	K-5	54	245	200	76	275	240	600	320	13	17,0
2	K-7	90	288	273	72	360	310	620	360	15	30,0

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
Internet www.barthel-armaturen.de

06.2010