

Flansch-Schnellschlussventil

Art. 01-752 G

PN16


quick closing valve spring loaded

Flansche gebohrt nach DIN PN16

Gehäuse: Sphäroguss
 Innenteile: Edelstahl
 Sitzdichtung: metallisch
 Temperaturbereich: -10°C - 140°C

flanges acc. to DIN PN16/10

Body: nodular cast iron
 Inner parts: stainless steel
 Seat sealing: metallic
 temperature range: -10°C - 140°C

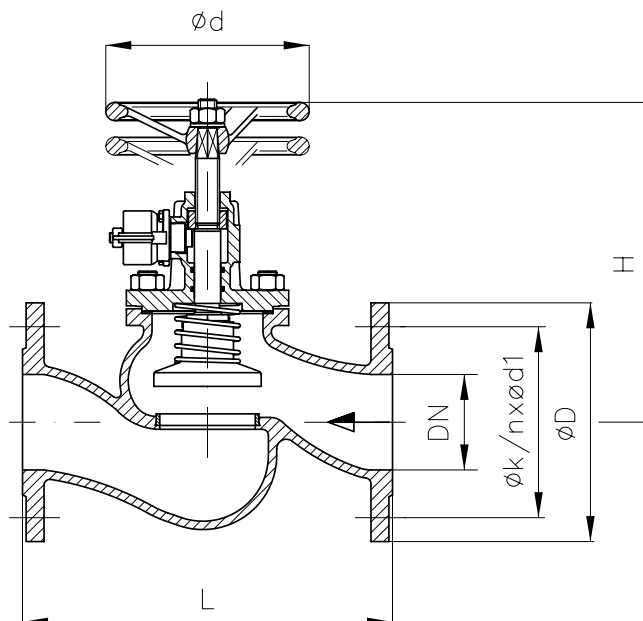

DN	PN	L	H	Ød	ØD	Øk	n x Ød1	kg			
15	16	130	165	100	95	65	4 x 14	3,9			
20	16	150	165	100	105	75	4 x 14	4,6			
25	16	160	170	100	115	85	4 x 14	5,4			
32	16	180	175	100	140	100	4 x 18	7,1			
40	16	200	200	160	150	110	4 x 18	9,6			
50	16	230	205	160	165	125	4 x 18	12,5			
65	16	290	240	200	185	145	4 x 18	17,6			
80	16	310	255	200	200	160	8 x 18	21,4			
100	16	350	325	250	220	180	8 x 18	35,7			
125	16	400	350	250	250	210	8 x 18	48,2			
150	16	480	395	315	285	240	8 x 22	72,0			
200	10	600	510	400	340	295	12 x 22	108,0			

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010