

Flansch-Schnellschlussventil

Art. 01-755 G

PN16


angle type quick-closing valve spring loaded

Flansche gebohrt nach DIN PN16

Gehäuse: Sphäroguss
 Innenteile: Edelstahl
 Sitzdichtung: metallisch
 Temperaturbereich: -10°C - 140°C

flanges acc. to DIN PN16

Body: nodular cast iron
 Inner parts: stainless steel
 Seat sealing: metallic
 temperature range: -10°C - 140°C

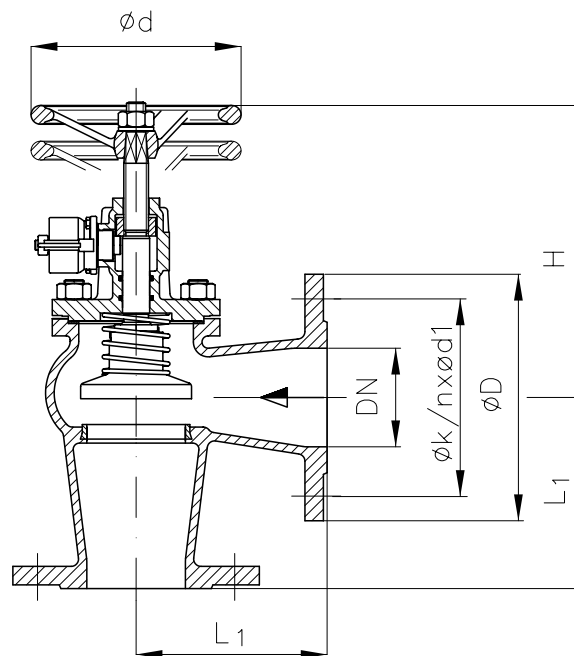

DN	PN	L1	H	Ød	ØD	Øk	n x Ød1	kg			
15	16	90	150	100	95	65	4 x 14	3,5			
20	16	95	155	100	105	75	4 x 14	4,0			
25	16	100	155	100	115	85	4 x 14	5,0			
32	16	105	155	100	140	100	4 x 18	6,0			
40	16	115	185	160	150	110	4 x 18	8,6			
50	16	125	190	160	165	125	4 x 18	11,5			
65	16	145	220	200	185	145	4 x 18	16,6			
80	16	155	235	200	200	160	8 x 18	20,0			
100	16	175	270	250	220	180	8 x 18	34,0			
125	16	200	300	250	250	210	8 x 18	46,0			
150	16	225	355	315	285	240	8 x 22	70,0			
200	10	275	400	100	340	295	12 x 22	120,0			

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010