

Muffen-Schnellschlussschieber

Art. 02-008

PN6

gate valve quick-closing type

Innengewinde nach ISO 228/1

Gehäuse: Rotguss (2.1096 / CC491K)

Innenteile: Messing

Sitzdichtung: -

Temperaturbereich: 0°C - 80°C


female thread acc. to ISO 228/1

Body: gunmetal

Inner parts: brass

Seat sealing: -

temperature range: 0°C - 80°C

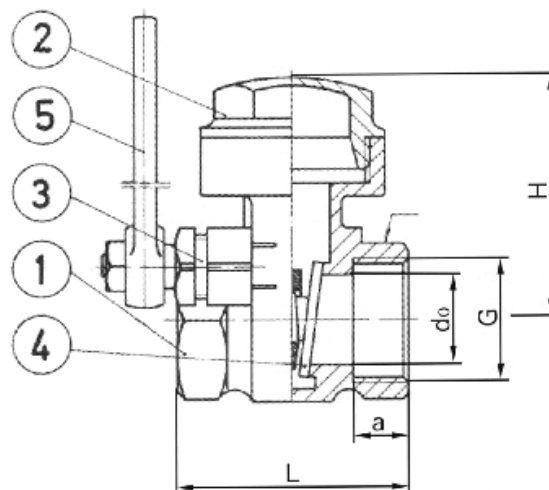

G	L	H	do	a	kg						
1/2	46	42	14	13	0,4						
3/4	51	52	19	14	0,55						
1	57	52	25	15	0,6						
1 1/4	61	64	31	18	1,05						
1 1/2	67	72	38	20	1,4						
2	77	88	50	20	2,05						
2 1/2	87	95	62	25	4,0						
3	91	110	74	25	5,6						

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
Internet www.barthel-armaturen.de

06.2010