

# Flansch-Überströmventil

**Art. 05-040.2**
**PN16**
**flange safety overflow valve**

Flansche nach DIN PN16

Gehäuse: Bronze G-CuSn10

Innenteile: Bronze

Sitzdichtung: weichdichtend

Temperaturbereich: -10°C - 80°C


flanges acc. to DIN PN16

Body: bronze

Inner parts: bronze

Seat sealing: soft sealed

temperature range: -10°C - 80°C

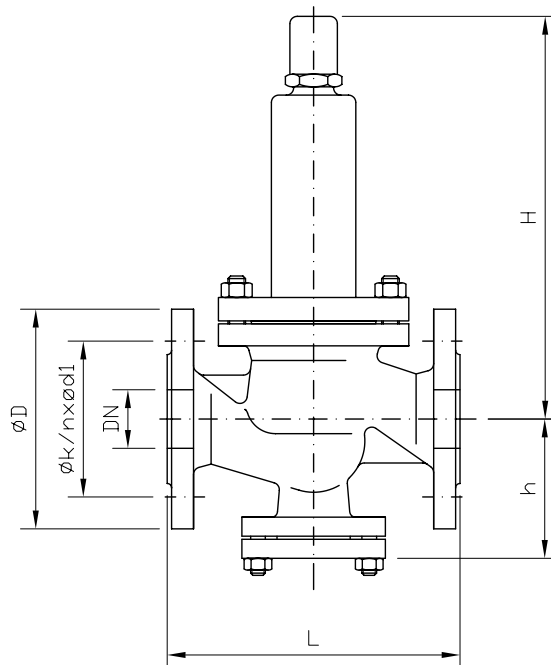

| DN  | L   | h   | H   | øD  | øk  | n x ød1 | kg   |  |  |  |  |
|-----|-----|-----|-----|-----|-----|---------|------|--|--|--|--|
| 15  | 130 | 95  | 275 | 95  | 65  | 4 x 14  | 8,0  |  |  |  |  |
| 20  | 150 | 95  | 275 | 105 | 75  | 4 x 14  | 8,0  |  |  |  |  |
| 25  | 160 | 95  | 275 | 115 | 85  | 4 x 14  | 9,0  |  |  |  |  |
| 32  | 180 | 95  | 275 | 140 | 100 | 4 x 18  | 11,0 |  |  |  |  |
| 40  | 200 | 95  | 275 | 150 | 110 | 4 x 18  | 13,0 |  |  |  |  |
| 50  | 230 | 120 | 360 | 165 | 125 | 4 x 18  | 23,0 |  |  |  |  |
| 65  | 290 | 155 | 360 | 185 | 145 | 4 x 18  | 31,0 |  |  |  |  |
| 80  | 310 | 190 | 495 | 200 | 160 | 8 x 18  | 48,0 |  |  |  |  |
| 100 | 350 | 200 | 495 | 220 | 180 | 8 x 18  | 69,0 |  |  |  |  |
| 125 | 400 | 210 | 660 | 250 | 210 | 8 x 18  | -    |  |  |  |  |
| 150 | 480 | 235 | 680 | 285 | 240 | 8 x 22  | -    |  |  |  |  |
|     |     |     |     |     |     |         |      |  |  |  |  |
|     |     |     |     |     |     |         |      |  |  |  |  |

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.  
 All data are not binding and subjected to change without notice.


**Fritz Barthel Armaturen GmbH & Co. KG**

 Schnackenburgallee 16  
 22525 Hamburg (Germany)

 Phone +49 (0) 40 398202-0  
 Fax +49 (0) 40 398202-77

 E-Mail post@barthel-armaturen.de  
 Internet www.barthel-armaturen.de

06.2010