

Flansch-Druckminderventil

Art. 05-050 DRV572

PN25

pressure reducing valve

Flansche geb. nach DIN EN 1092 PN25

Gehäuse: Rotguss (2.1096 / CC491K)

Innenteile: Hostaform C -Messing

Sitzdichtung: NBR

Temperaturbereich: 0°C - 75°C


flanges acc. to DIN EN 1092 PN25

Body: gunmetal

Inner parts: brass

Seat sealing: NBR

temperature range: 0°C - 75°C

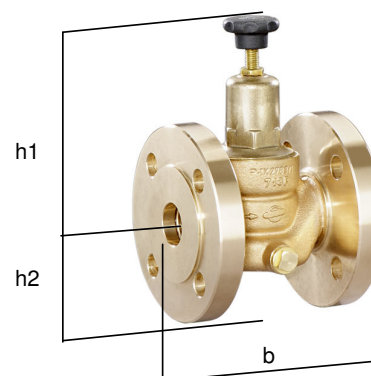

DN 15 - DN 32
(design DN 80 as below)

DN	b	h1	h2	Kvs	kg							
15	130	139	48	2,9	2,37							
20	150	140	53	3,9	3,13							
25	160	139	58	5,4	4,12							
32	180	140	72	6,1	6,02							
40	200	241	75	9	8,64							
50	230	241	83	13	11,3							
65	290	256	93	20	13,45							
80	310	256	100	24	19,1							

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
Internet www.barthel-armaturen.de

06.2010