

Flansch-Keil-Rundschieber

Art. 02-064

PN40

flange wedge gate valve


DIN 3352-F5

Flansche geb. nach DIN EN 1092 PN40

Gehäuse: Stahlguss
 Innenteile: Edelstahl
 Sitzdichtung: Edelstahl
 Temperaturbereich: -20°C - 400°C

flanges acc. to DIN EN 1092 PN40

Body: cast steel
 Inner parts: stainless steel
 Seat sealing: stainless steel
 temperature range: -20°C - 400°C

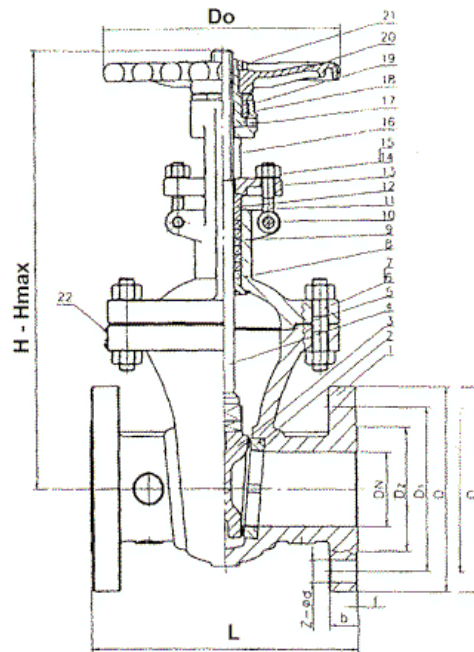

DN	L	H max.	øD	øD1	Z x ød	øDo	kg					
40	240	365	150	110	4 x 18	203	30					
50	250	420	165	125	4 x 18	230	31					
65	290	452	185	145	8 x 18	230	39					
80	310	498	200	160	8 x 18	254	52					
100	350	595	235	190	8 x 22	305	82					
125	400	708	270	220	8 x 26	355	129					
150	450	810	300	250	8 x 26	406	156					
200	550	1010	375	320	12 x 30	455	266					
250	650	1220	450	385	12 x 33	508	371					
300	750	1440	515	450	16 x 33	559	551					
350	850	1580	580	510	16 x 36	610	-					
400	950	1780	660	585	16 x 39	660	-					
500	1150	2160	755	670	20 x 42	-	-					
600	1350	2600	890	795	20 x 48	-	-					

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010