

Flansch-Keil-Rundschieber

Art. 02-060

PN16

flange wedge gate valve


DIN 3352-F5

Flansche geb. nach DIN EN 1092 PN16

Gehäuse: Stahlguss
 Innenteile: Edelstahl
 Sitzdichtung: Edelstahl
 Temperaturbereich: -20°C - 400°C

flanges acc. to DIN EN 1092 PN16

Body: cast steel
 Inner parts: stainless steel
 Seat sealing: stainless steel
 temperature range: -20°C - 400°C

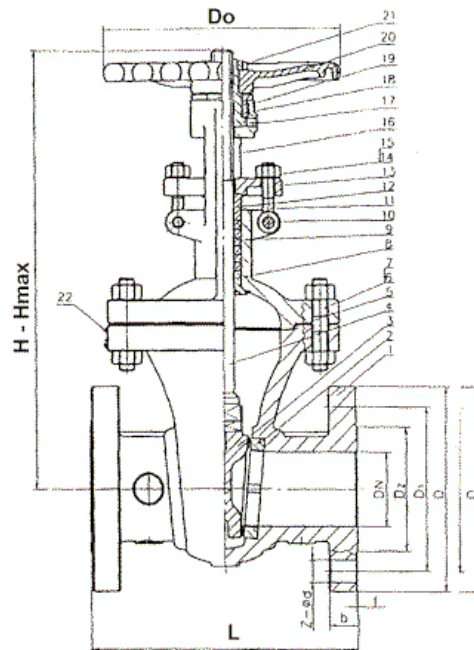

DN	L	H max.	øD	D1	Z x ød	øDo	kg					
40	240	425	150	110	4 x 18	220	12					
50	250	439	165	125	4 x 18	240	13					
65	270	452	185	145	4 x 18	240	26					
80	280	530	200	160	8 x 18	280	30					
100	300	620	220	180	8 x 18	320	40					
125	325	756	250	210	8 x 18	360	60					
150	350	845	285	240	8 x 22	360	71					
200	400	1041	340	295	12 x 22	400	120					
250	450	1244	405	355	12 x 26	450	200					
300	500	1474	460	410	12 x 26	560	300					
350	550	1663	520	470	16 x 26	640	560					
400	600	1886	580	525	16 x 30	720	680					
500	700	2050	715	650	20 x 34	720	1050					
600	800	2270	840	770	20 x 36	720	1500					

Alle Angaben sind unverbindlich und bleiben technischen Änderungen vorbehalten.
 All data are not binding and subjected to change without notice.



Fritz Barthel Armaturen GmbH & Co. KG

Schnackenburgallee 16
 22525 Hamburg (Germany)

Phone +49 (0) 40 398202-0
 Fax +49 (0) 40 398202-77

E-Mail post@barthel-armaturen.de
 Internet www.barthel-armaturen.de

06.2010